

# for Microsoft

### Quick Install Manual

**OnTime® for Microsoft version 6.2.x** 

**Revision 1** 

OnTime is a registered community trademark (#004918124). The trademark is registered with the Trade Marks and Designs Registration Office of the European Union. OnTime is a registered Japanese trademark (#5569584). The trademark is registered with the Japan Patent Office





## OnTime<sup>®</sup> for Microsoft

This Quick Install guide is the fast track to install OnTime for Microsoft.

For more details, please obtain the 'OnTime for MS - Installation & Configuration guide'.

# **Table of Contents**

About OnTime <sup>®</sup> for Microsoft	3
Preparing the new OnTime installation	4
Server requirements	
Ports for the OnTime server	
Ports for Office 365	5
Prerequisites	6
License key	7
OnTime Installation	8
Installing the SQL Server Express	
Install OnTime	
OnTime Configuration	11
Database	
License key	
Domain settings	
Office 365 configuration, Authentication	
Domains/Source	
Groups	18
Global Settings - Backend	19
Dashboard	20
OnTime User – Calendar	
OnTime Client Web Desktop	
OnTime Client Web Mobile	



# **About OnTime<sup>®</sup> for Microsoft**

This 'quick install guide' describes the fewest possible steps to make the OnTime Group Calendar available for web and mobile users.





# Preparing the new OnTime installation

## Server requirements

The OnTime installation is supported on - Windows Server 2019 with Microsoft SQL Server<sup>®</sup> 2016/2019 Express

OnTime must be installed running as a Windows administrator.

For small and middle-size installations of OnTime, you can use Microsoft SQL Server<sup>®</sup> 2016/2019 Express which is free.

We recommend using the full Microsoft SQL Server if your OnTime installation has more than 2.000 users.

#### Processor

 Intel-compatible processor with a minimum speed of 2 GHz or a faster processor

#### RAM

- Minimum of 8 GB Ram dedicated for the OnTime solution
- If you are running OnTime on a Hyper V configuration, then you need to configure it to use static memory for the SQL Server to perform properly.

#### Hard Disk Space

• Minimum of 20 GB hard drive dedicated to the OnTime solution





#### Typical 500 users install

- Intel-compatible processor with a minimum speed of 2 GHz or a faster processor
- Minimum of 8 GB Ram dedicated for the OnTime solution
- Minimum of 20 GB hard drive dedicated for the OnTime solution

#### Ports for the OnTime server

The ports 80 and 9080 are required open for HTTP data. The ports 443 and 9443 are required open for HTTPS data. The port 8080 is required for the admin client, http is only supported for localhost. The port 8443 is required for the admin client, https is supported remotely

#### Ports for Office 365

If OnTime configuration for Office 365, please check ports outwards through the firewall (port 443) from the OnTime server: <u>https://login.microsoftonline.com</u> <u>https://graph.microsoft.com</u> <u>https://portal.azure.com</u>





#### .

#### AD domain

The OnTime server can be part of your user AD domain to ensure your OnTime users web authentication (SSO) without providing their AD password. An OnTime server installed in a Windows 'Workgroup' is supported. We expect the Workgroup server to be dedicated to OnTime because this will be more secure. The name of the workgroup must be descriptive. Workgroup names like 'Workgroup' or 'Workgroup01' will not be accepted.

#### SQL 2019 Express or an existing MS SQL Server must be available.

The SQL Server Express may be downloaded from Microsoft. It is free. Limitations: Microsoft SQL Server Express supports 1 physical processor, 1 GB memory, 10 GB storage.

#### **Create an Impersonation User in MS Exchange/Office 365**

- a. Mailbox user (minimum type 1 if in Office 365).
- b. Assign the user to the "ApplicationImpersonation Role".





# License key

- OnTime requires a license key with the required number of users enabled to run.
- These keys are delivered directly by IntraVision or an OnTime Partner.
- A list of OnTime Partners is available at <u>www.ontimesuite.com</u>.

For obtaining a license key, please provide the following info:

- your Company name
- total number of users, including rooms and equipment
- a. OnTime server in an AD domain,

check your OnTime server's environment by logging in as a domain user.

In a Command prompt > set (Enter) – to see your "USERDOMAIN"

📾 Administrator: C:\Windows\system32\cmd.exe	_ 🗆 🗡
TMP=C:\Users\ADMINI~1\AppData\Local\Temp\2 USERDOMAIN+ONTIMEMSDEMO USERNAME=Administrator USERPROFILE=C:\Users\Administrator windir=C:\Windows	
C:\Program Files\IntraVision} <mark>set_</mark>	-

b. OnTme server in a workgroup, check your Workgroup name.

Enter 'net config workstation' in a Command prompt to see your 'Workstation domain' (Workgroup name).

 If you are running a trial installation, a time-limited, fully functional key should have been provided for you when you downloaded the OnTime software from www.ontimesuite.com.



# **OnTime Installation**

#### **Quick installation**

It is the easy way of installing OnTime with a local, silent installation of the MS SQL Server 2016 at 'C:\Program Files' - then run one command that in turn creates a database for OnTime, installs a Windows service 'OnTimeMSAuth' that offers Windows domain logon authentication for web users (SSO) - and at last installs the Tomcat server used for OnTime web access.

An MS SQL Server 2016 with scripts for a silent install may be downloaded from the OnTime web site:

https://file.ontimesuite.com/SQLExpress

The tool to inspect the databases in the Microsoft 'SQL Server Management Studio' (SSMS). Currently, a link to download the tool from Microsoft: <u>https://docs.microsoft.com/en-us/sql/ssms/download-sql-server-management-studio-ssms</u>

It is the default installation with a local SQL Server, installed at C:\Program Files\Microsoft SQL Server\

#### Installing the SQL Server Express

To install the SQL server, start a Command Prompt in administrator mode. Run the command: sql\_express\_full\_setup.cmd

This command will silently install the SQL server.

C:\Install\OnTime (silent)-MS SQL Server10.1> sql\_express\_full\_setup.cmd Installing SQL Express Server C:\Install\MSSQL\SQL Server Install package\scripts>

If you see other messages than "Installing SQL Express Server" your Windows server probably needs some updates from Microsoft. Please resolve these prerequisites and rerun the command.

It may take 5-10 minutes to execute the installation of SQL Server Express.

Result: The SQL Server is installed in the path: C:\Program Files\Microsoft SQL Server



#### **Install OnTime**

Unzip the downloaded OnTime package at a temporary location, move the directory OnTimeMS-x.x to the recommended path: C:\Program Files\IntraVision\

> Windows (C:) > Progr	am Files > IntraVisio	on > OnTimeMS-x	ĸ
🗊 🛝 Sort 🗸 🗮 Vie	w ~		
Name	Date modified	Туре	Siz
addin-classic-outlook-poll	19/12/2024 10.18	File folder	
🔁 addin-new-outlook-teams-rail	19/12/2024 10.18	File folder	
🔁 addin-teams-channel	19/12/2024 10.18	File folder	
🔁 admintoken	19/12/2024 10.18	File folder	
catering	19/12/2024 10.18	File folder	
🔁 cmd	19/12/2024 10.18	File folder	
늘 jdk	19/12/2024 10.18	File folder	
🔁 ontime.ms.acs	19/12/2024 10.18	File folder	
ontime.ms.auth	19/12/2024 10.18	File folder	
🔁 otdbupdate	19/12/2024 10.18	File folder	
pollarity	19/12/2024 10.19	File folder	
📄 programdata	19/12/2024 10.19	File folder	
scripts	19/12/2024 10.19	File folder	
sqlserver	19/12/2024 10.19	File folder	
tomcat	19/12/2024 10.19	File folder	
visitor	19/12/2024 10.19	File folder	
🖫 command.cmd	19/12/2024 10.18	Windows Comma	
🖫 install.cmd	19/12/2024 10.18	Windows Comma	
Dffice365TomcatRestart.zip	19/12/2024 10.18	Compressed (zipp	
🐁 start-catering.cmd	19/12/2024 10.19	Windows Comma	
🐁 start-pollarity.cmd	19/12/2024 10.19	Windows Comma	
start-visitor.cmd	19/12/2024 10.19	Windows Comma	
🐁 stop-catering.cmd	19/12/2024 10.19	Windows Comma	
🐁 stop-pollarity.cmd	19/12/2024 10.19	Windows Comma	
stop-visitor.cmd	19/12/2024 10.19	Windows Comma	
🖫 uninstall.cmd	19/12/2024 10.19	Windows Comma	
🖫 upgrade.cmd	19/12/2024 10.19	Windows Comma	



Right-click 'install.cmd' and choose 'Run as Administrator'

This command will do the following things:

- 1. You will be asked for a new password for the OnTime admin
- 2. It will create a database, 'ontimems', for OnTime use in the local SQL Server
- 3. It will configure the user NT AUTHORITY\USER as a user in the ontimems database with the api\_role
- 4. It will install a Windows service 'OnTimeMS Auth' that offers Windows domain logon authentication for web users, SSO Single Sign On
- 5. It will install the Tomcat web server used for OnTime
- 6. Create a database for Pollarity
- 7. **Note:** Pollarity has an optional licence.
- 8. Create a database for Catering
- 9. Note: Catering has an optional licence.
- 10. Create a database for Visitor
- 11. **Note:** Visitor has an optional licence.



# **OnTime Configuration**

From a browser - Open the administration URL – <u>https://ontime.example.com:8443/ontimegcms/admin</u> **Note:** Please insert your relevant URL instead of 'ontime.example.com'.

In the initial OnTime setup phase you may run administration without certificates locally at the OnTime server with http and port 8080 for the apache Tomcat. http://127.0.0.1:8080/ontimegcms/admin

Administrator:	admin	(beware of casing, no capitals)
Password:	*****	(the password from your installation phase)





# Database

In the web admin interface, "OnTime Admin Center", click "Database".

Click "Test" in the upper menu line to test the database connection.

Upon the response "OK Connection to Database is working" click "Back". Click Save.

OnTime®	
ONTIME ADMIN CENTER	TEST SAVE RESET
DASHBOARD	DATABASE SETTINGS
<b>DATABASE</b>	Server localhost
DOMAINS	Integrated Security
GLOBAL SETTINGS	OK Connection to Database is working
LUSERS	
K GROUPS	Back
LEGEND	

#### License key

Click 'Dashboard'

- Enter your license key by clicking 'License' in the upper right corner of the dashboard. Click 'Save'

OnTime®		Licensed to OnTime Inc. demo (LS) 115 of 2500 Users in use Perpetual
ONTIME ADMIN CENTER	EDIT LICENSE REFRESH	
DASHBOARD	DASHBOARD	
<b>DATABASE</b>		
DOMAINS	Application Company OnTime Inc. demo (LS) Application: User Domain INTRAVISION	Last Status Change: Tue Mar 08 11:36:30 CET 2022
GLOBAL SETTINGS	Appl. IDs Admin. Desktop, Mobile, Pollarity, Catering, Visitor Subscription for Users 115 / 2500 Trial Excires: Never	Last Status Change: Tue Mar 08 11:37:02 CET 2022
LUSERS	Connection Serv License Key	
K GROUPS	SQL Database Co	Last Status Change: Tue Mar 08 11:36:26 CET 2022
LEGEND	Active Exchange I	
POLLARITY	Scheduled Servi CANCEL Directory Synchre	SAVE Last Status Change: Tue Mar 08 11:58:21 CET 2022
	User & Group Synchronisation: SCHEDULED TO RUN 02:00 START	Last Status Change: Tue Mar 08 11:58:25 CET 2022

In the Dashboard click 'stop/start' the application.





Note: When you see the Connection/Database Service "Running" (green), press 'F5' to refresh the whole web page from the new database.

## **Domain settings**

Click 'Domains/Create New' to configure your Exchange environment.

0	nTime®								
ONT	ONTIME ADMIN CENTER Save   Cancel   Register Application   Remove								
	DASHBOARD	ADD/EDIT DOMAIN							
	DATABASE	Domain Name Priority	Office 365 Users	Domain Disabled					
	DOMAINS	Domain Type	Office 365						
٢	GLOBAL SETTINGS	Office 365 Sou	rce Field Mapping Advanced						
	USERS	Authentication Type	Modern Method (OAuth - Client Credentials)						
2	GROUPS	Anchor EWS User	Modern Method (OAuth - Impersonation User) Modern Method (OAuth - Client Credentials)						
	LEGEND	Ргоху							
dt	POLLARITY	Hostname							

**Domain name** is a text field for naming your domain setup.

**Priority -** is for prioritising the users in OnTime. Priority '1' is the highest priority. **Domain Type** – 'Office 365'.

#### Office 365 configuration, Authentication

Authentication Type: Modern Method (OAuth – Client Credentials).

**Anchor EWS User** - is a user required only for technical purposes. EWS API fails when a user is not provided for a call. And if some calls have an explicit user - such as list of appointments, others don't - such as getting a server timezone list. To have at least some user in the call, so that EWS does not fail we introduced an anchor user, which is simply a valid user and has no special abilities, apart from making EWS API succeed on the user-less calls.

Normally this username is written as an email address (UPN name

The three values, for Application (client) ID, Directory (tenant) ID, Client Secret Value - are obtained from Microsoft Portal, look below.

Missing parameters in 'Microsoft Entra ID' will be listed.

Quick Install Guide





#### Register OnTime in 'Microsoft Entra ID'

The Oauth registering of the OnTime application in Azure is relevant for Modern Method (Oauth – Client Credentials) - and Modern Method (Oauth – Impersonation User)

**Note:** We suggest Notepad as a media in-between for copying values to OnTime.

- a) Login to https://portal.azure.com
- b) Click view 'Manage Microsoft Entra ID'
- c) Click 'App registrations'.
- d) Click 'New registration'.
- e) Enter a 'Name' for the application. Choose 'Accounts in this organizational directory only - Single tenant'. Populate 'Redirect URI', insert <u>http://localhost:8080/ontimegcms/code.html</u> - this field cannot be empty. Select a Platform 'Web' Click 'Register'.
- f) On next page (Overview) Copy the values [Application (client) ID] and [Directory (tenant) ID] into a text editor e.g. Notepad.
- g) Click 'Add a certificate or secret'
- h) Click '+ New client secret'
- i) Add a description, such as 'OnTime Client Secret'
- j) Choose expiration. Click Add
- k) Copy the value of the secret ID into the text editor.
- I) Click 'Authentication' tab. Tick 'Access Tokens'. Click 'Save'.
- m) Copy the three values from Azure in the text editor into the page 'OnTime Admin Center' 'Domains Add/Edit Domain/Authentication'.
- n) Click 'API permissions' tab. Click 'Add a permission'.



- o) Click 'Microsoft Graph'
- p) Click 'Application permissions'
- q) The following API permissions have to be ticked, type a few letters in the Search field and tick the five permissions: Calendars.ReadWrite, Directory.Read.All, MailboxSettings.ReadWrite, People.Read.All, Place.Read.All, User.Read.All

You may remove 'User.Read', if already selected.

- r) Click 'Add a permission'.
- s) Click 'Microsoft Graph'
- t) Click 'Delegated permissions'
- u) Search for EWS, tick: EWS.AccessAsUser.All
- v) Click 'Add a permission'
- w) Click 'APIs my organization uses'
- x) In the field for search, enter 'Office'
- y) Click 'Office 365 Exchange Online
- z) Click 'Application permissions'
- aa)Tick 'full-access\_as\_app'
- bb)Click 'Add permissions'
- cc) Click 'Grant admin consent for "your company" Click 'Yes' to answer the question ' Do you want to grant consent ...'
- dd) All done ;-)



#### Description of OnTime functionality by Azure permissions

Calendars.ReadWrite - get Online Meeting event, build Online Meeting event or add to existing event.

Directory.Read.All - used for get members for MS Teams group, get Office Location for room, get and validate current application permissions.

MailboxSettings.ReadWrite - used for automaticRepliesSetting and make it possible to get and update AutoReply for mailboxes.

User.Read.All - translate event Ids between MS Graph and MS Outlook API's.

Place.Read.All - get room extended information like capacity.

People.Read.All – used for Advanced Search

EWS.AccessAsUser.All - Delegated permissions used for OAuth authentication functionality

OnTime®				
ONTIME ADMIN CENTER	Save   Cancel   Register	Application   Remove		
DASHBOARD	ADD/EDIT DOMAIN Domain Name	Office 365 Test users	Domain Disabled	
B DATABASE	Priority		Domain Disabled	
DOMAINS	Domain Type	Office 365		
GLOBAL SETTINGS	Office 365 Sou	rce Field Mapping Advanced		
LUSERS	LDAP	Enable LDAP		
K GROUPS	Persons	testusers@ontimecalendar.com $\times$		
LEGEND	Rooms	testrooms@ontimecalendar.com × dynamicgroup-resor cbrroom@ontimecalendar.com ×	urces@intravi ×	
<b>POLLARITY</b>	Shared Desks	testshareddesks@ontimecalenda 🗙		
	Equipment	testequipments@ontimecalendar $\times$		

#### **Domains/Source**



**Source** is where you configure users included in your OnTime setup.

#### 'Untick' 'Enable LDAP'.

Add distribution groups of persons, rooms, shared desks, equipment you want to be included in the OnTime calendar. The email addresses of these distribution groups are written into the fields. More groups or individuals can be added, separated by commas.

Click 'Save' to save your Domain Settings.

To reflect your new settings, go to the Dashboard - Stop and Start the Application. Then check that the "Database Service" and "Exchange Service" both show "Running"





## Groups

Select 'Groups/Dynamic' to create a group of persons included in OnTime selected above in the 'Synchronization Source' section in your **Domain settings.** 

Click 'Create New'. Creating at least one group will ensure that users will see more than one user in OnTime.

Enter a Group name, enter a Category (text) to be shown in the user interface, choose 'All' in Domain, tick 'Show all from domain selection'.

OnTime®			
ONTIME ADMIN CENTER	Save   Cancel		
DASHBOARD	EDIT GROUP		
B DATABASE	Group Name	testusers	Group Disabled
DOMAINS	Category	All	
GLOBAL SETTINGS	Domain	All	
LUSERS	Show all from domain selection	V	
CROUPS			
Directory			
Static			
Dynamic			

Click 'Save'.

Changes in the 'dynamic groups' must be followed by clicking "Start" at "User & Group Sync" in the **Dashboard**.



# **Global Settings - Backend**

Click Global/Backend

Choose 'Yes' at 'Enable subscription for Calendar Changes at Startup'.

- Click 'Save' to ensure the synchronisation subscription service starts every time you click stop/start at the 'Application Status' in the Dashboard.

									Disconsisten der Territoren (1991)
0	nTime®								Licensed to OnTime Inc. demo (LS) 128 of 2500 Users in use Perpetual
ONT	TIME ADMIN CENTER	SAVE RESET							
	DASHBOARD	GLOBAL SETTINGS - BACKEND							
	DATABASE	Synchronisation Time Interval							
:	DOMAINS	Past events synchronisation period			30 🗘	Day	s		
	GLOBAL SETTINGS	Sync Forward			24 🗘	Mor	nths (B	e aware	e that the total time span synchronised cannot be more than 4 years in total)
	Backend	Overnight Maintenance Tasks							
	Frontend	Number of threads for scheduled event synchronisation			5 🗘				
	Name Formats								
	Default Settings	Time to start maintenance tasks	02:00	)	V				
	Roles	Days to perform catch-up event synchronisation	Mon	Tue	Wed	Thu	Fri	Sat	Sun
	USERS	Directory/User/Group syncronization	<b>v</b>	~	<b>V</b>	$\checkmark$	<b>V</b>	<b>~</b>	V
2	GROUPS	Photo syncronization	<b>~</b>	~	$\checkmark$	$\checkmark$	<b>V</b>	<ul> <li></li> </ul>	
	LEGEND	Permission syncronization	<b>V</b>	$\checkmark$	$\checkmark$	$\checkmark$	<b>V</b>	<b>~</b>	<
		Event syncronization	~	$\checkmark$	$\checkmark$	<b>v</b>	$\checkmark$	$\checkmark$	$\checkmark$
ılı	POLLARITY								
-		Enabling of Services at Server Startup							
-	CATERING	Enable Subscription for Calendar Changes at Startup	YES		~				



# Dashboard

The main page of the 'OnTime Admin Center' is the Dashboard. This page presents an overview of the processes in OnTime. When you change the values in the other pages, you must restart the OnTime application by clicking "Stop/Start" in the according section.

OnTime®					Licensed to OnTime Inc. demo (L5) 115 of 2500 Users in use Perpetual
ONTIME ADMIN CENTER	EDIT LICENSE REFRESH				
DASHBOARD	DASHBOARD				
B DATABASE					
DOMAINS	Application				
	Application:	RUNNING		STOP	Last Status Change: Tue Mar 08 11:36:30 CET 2022
GLOBAL SETTINGS	Subscription for calendar changes:	RUNNING		STOP	Last Status Change: Tue Mar 08 11:37:02 CET 2022
LUSERS	Connection Services				
🗥 GROUPS	SQL Database Connection:	RUNNING			Last Status Change: Tue Mar 08 11:36:26 CET 2022
LEGEND	Active Exchange Domains:	3 OUT OF 3 RUNNING			
POLLARITY	Scheduled Services				
III FOLDIART	Directory Synchronisation:	SCHEDULED TO RUN 02:00	START		Last Status Change: Tue Mar 08 11:58:21 CET 2022
	User & Group Synchronisation:	SCHEDULED TO RUN 02:00	START		Last Status Change: Tue Mar 08 11:58:25 CET 2022
VISITOR	Photo Synchronisation:	SCHEDULED TO RUN 02:00	START		Last Status Change: Tue Mar 08 11:58:13 CET 2022
	Permission Synchronisation:	SCHEDULED TO RUN 02:00	START		Last Status Change: Tue Mar 08 11:58:47 CET 2022
	Event Synchronisation:	SCHEDULED TO RUN TOMORROW 02:00	START		Last Status Change: Tue Mar 08 11:58:32 CET 2022

The section **Persistent** shows the status of the OnTime Application and the automatic subscription of calendar changes. Both should be running within normal production.

The section **Connection** shows the status of the connections to the OnTime SQL database and the Exchange service. Both should be running within normal production.

The section **Scheduled** normally shows the status stopped because running is done automatically at midnight. But the five positions within this section can be started on-demand to reflect changes at once.

**Directory Sync** takes care of updating users/groups from Exchange.

**User & Group Sync** synchronises the Exchange users/groups onto the OnTime SQL tables.

Photo Sync imports the users' photos/avatars from the Exchange server

**Permission Sync** updates the users' permissions to update other users' calendars

**Event Sync** is synchronising all users calendar entries and may take a considerable amount of time.




# **OnTime User – Calendar**

# **OnTime Client Web Desktop**

OnTime from the user perspective:

From a browser - Open the user URL -<u>http://ontime.example.com/ontimegcms/desktop</u> Note: Please insert your relevant URL instead of 'ontime.example.com'.

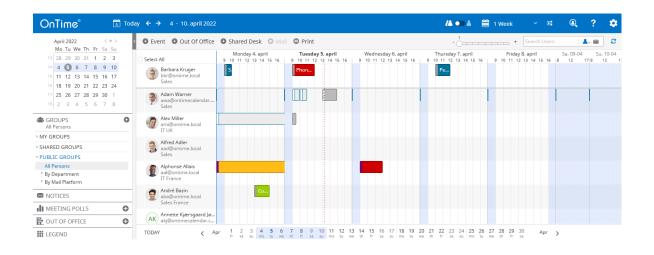





# **OnTime Client Web Mobile**

OnTime from the user perspective:

From a mobile browser - Open the user URL -<u>http://ontime.example.com/ontimegcms/mobile</u> Note: Please insert your relevant URL instead of 'ontime.example.com'.

≡	MY	TEAM	~ @		::
Mar.			lay, 15		
2022 8	10	12	14	16	18
BG					
Adam War	ner				
Alphonse /	Allais				
E					
Barbara Ki	ruger				
6					
09:00 12:00					
Home Po		+	Out of 0.	C Sea	<b>λ</b> arch